




Accessories HC-6830



PSM-6830 AC AC/DC power adapter

The AC/DC power adapter enables the HC-6830 to be powered from an AC power source (range: 100 to 240 Vac).

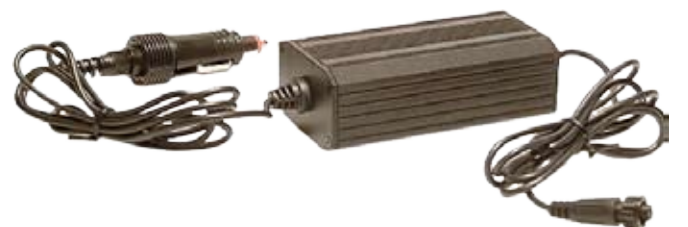

PSM-6830 DC DC/DC power adapter

The DC/DC power adapter enables the HC-6830 to be powered from a DC power source (range: 10 to 32 Vdc).



PSB-6830 Rechargeable battery pack

The rechargeable battery pack allows a portable use of the HC-6830 secure field communication terminal for approx. 2 hours (autonomy depends on operating mode used).



MDP-6830 Mounting plate

Mounting plate with integrated shock absorbers and frontal quick release clamp for easy installation of one HC-6830.



PDE-6830 Hard case

A ruggedised portable case specially adapted for the HC-6830.



PDE-6830 Field carrying bag

The field carrying bag is designed to store all the basic items (HC-6830 unit, one power adapter, one extra battery, documentation interface cables etc.) for transportation.



CAI-6830 Radio cable

Upon request and upon receipt of details concerning brand and type of radio, special radio interface cables may be offered. Please inquire with our Customer Project Service Department.



CAI-6830 Back to back cable

Test cable for connecting two HC-683X family radio modems in «back-to-back» configuration.